

Anti-Vibration Bracket for A/C Equipment

Anti-Vibration Bracket for A/C Equipment Piping

SC Keep Y Bracket

Double -Sided Type

PAT.P

Optimal for preventing vibration of ducts, channels, angles, racks, etc!
Can be installed to existing bolts!

Environmentally Friendly
Plating Compliant with
RoHS Directives


Feature 1:

No Assembly! Easy Installation!


No need to disassemble the main body for installation, which minimizes work time!

- (1) Bolt detachment prevention function
- (2) Our original hook lock system allows for easy installation!

Installation Example

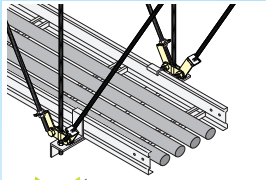

Hook Lock System



Bolt Detachment Prevention Function

Retrofit Type

Feature 3:


Possible to Retrofit!
Simple Installation!

This open type allows for easy attachment and detachment of anti-vibration threaded rods!
The exclusive washer prevents threaded rod detachment!

Exclusive Washer

NEW!

Initial Installation
(Round Opening) Type



Feature 2:

Easy Adjustment! Sufficient Clearance for Threaded Rods!

Anti-vibration threaded rods and main body bolts do not interfere with each other.


Feature 4:

Rotation Prevention Function!


The raised portion of the main body prevents the bolt from rotating when tightening the nut.

Installation Process


- (1) Loosen the main body bracket and attach the threaded rod.

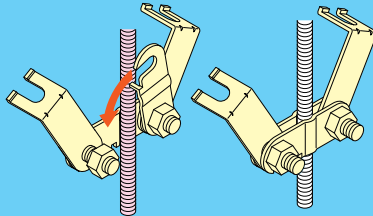


- (2) Attach the anti-vibration threaded rods to the bracket.

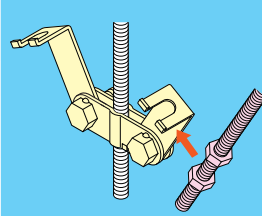

- (3) Insert the exclusive washer at the location shown in the drawing.



- (4) Tighten the top and bottom double nuts on both sides to complete installation.





KYA-W SC Keep Y Bracket (Double-Sided Type) For Retrofitting

PAT.P

KYS-W SC Keep Y Bracket (Double-Sided Type) For Initial Installation

PAT.P



- The Keep Y bracket KYA3-W is an anti-vibration bracket for W3/8, and KYA4-W is for W1/2.
- ▲ The exclusive washer must be used for the Keep Y bracket for retrofitting.
- The number in the parentheses for quantity indicates the quantity in the box.

For Retrofitting

Material	Unichrome (U)	Stainless Steel (S)
Model No.	KYA	S-KYA

Model No.	Compatible Threaded Rod	Size						Quantity			Delivery Date Confirmation	
		A	B	t1	t2	t3	W	Main Body	Exclusive Washer	Anti-Vibration Nut	U	S
KYA 3-W	W3/8	46	57	2.5	2.5	1.0	25	60(10)	120(20)	W3/8 240(40)		
KYA 4-W	W1/2	65	54	2.5	2.5	1.2	32	40(10)	80(20)	W1/2 160(40)		

For Initial Installation

Material	Unichrome (U)	Stainless Steel (S)
Model No.	KYS	S-KYS

Model No.	Compatible Threaded Rod	Size					Quantity		Delivery Date Confirmation	
		A	B	t1	t2	W	Main Body	Anti-Vibration Nut	U	S
KYS3 -W	W3/8	46	57	2.5	2.5	25	60(10)	W3/8 240(40)		
KYS4 -W	W1/2	65	54	2.5	2.5	32	40(10)	W1/2 160(40)		

The mark indicates compliance with RoHS directives.