

# Super S Level Band



Simple and Easy Installation(Five Improved Functions)!

## Feature 1:

Top Band(Adjustment Band) Attachment and Detachment is Possible!

- \* Nuts do not need to be removed!
- \* Nuts require very little loosening!
- Band attached and detached is possible by loosening just a few mm.

## Feature 2:

Function for Preventing Band Detachment!

## Feature 3:

Base with Nut Used!



- \* Threaded rod attached and detached is possible!
- \* Anchor installation is easy!
- \* According to the pipe height, threaded rod replacement is possible!
- \* An elongated hole is used for the anchor base hole (delicate adjustment is possible)!

## Feature 4:


Anchor Hole Pitch is Engraved on the Base!

## Feature 5:


Center Mark is Engraved at the Center of the Base!

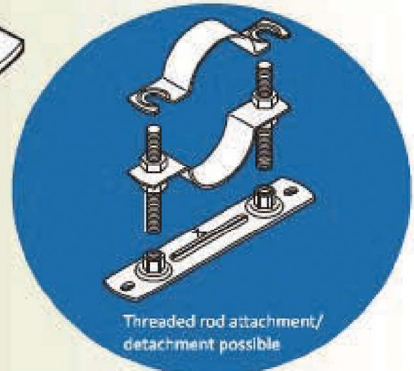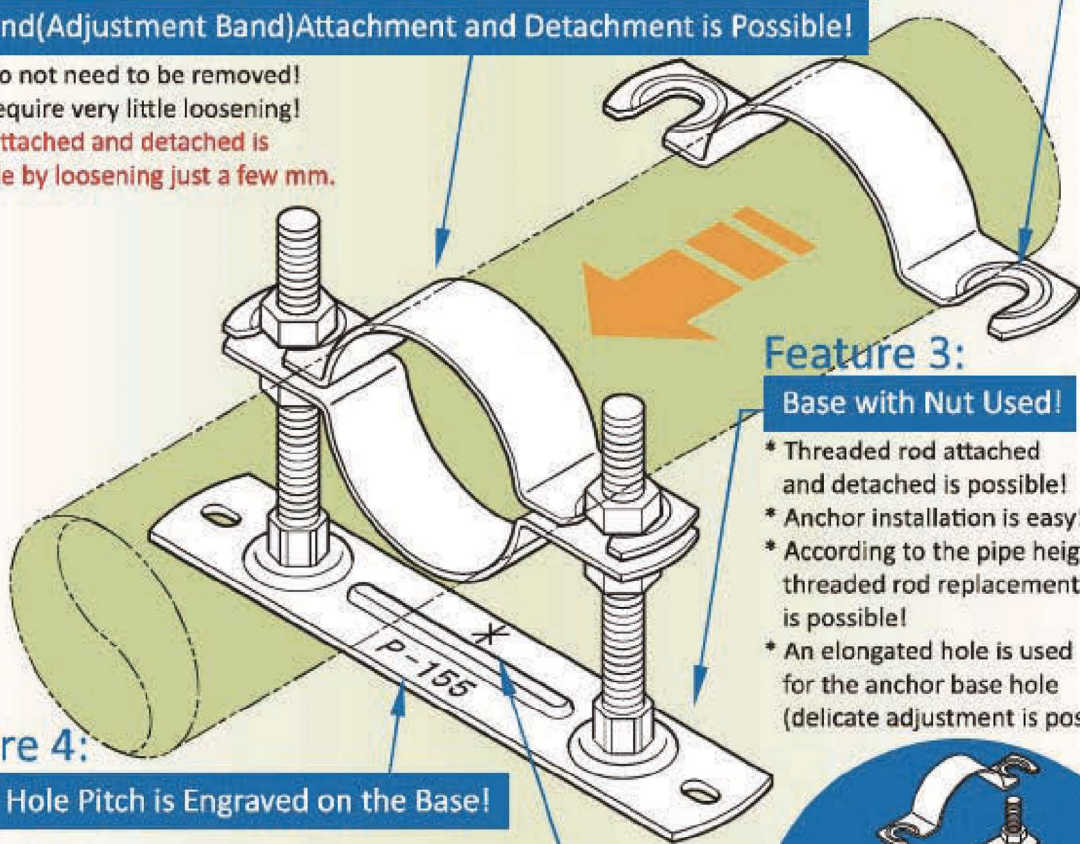


## Installation Process

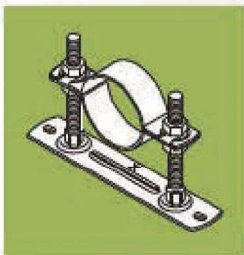


(1) Place the level band.

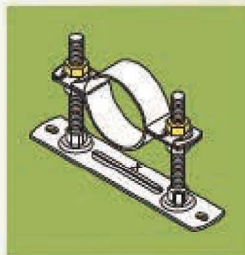


(2) Loosen the nuts a few mm.

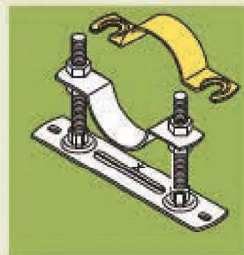

(3) Detach the top band.

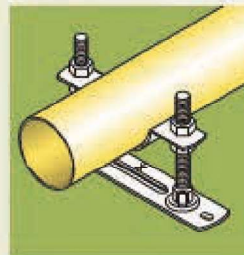

(4) Insert the pipe.

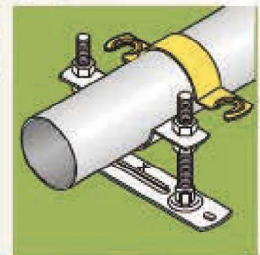

(5) Set the top band by sliding it over the pipe.